



NIBE MagiCAD Plugin for AutoCAD

User guide

19/12/2025

Content

1	GENERAL	3
1.1	About This Document	3
1.2	Installing the Software	3
1.2.1	Required Third-party Software	3
1.2.2	Installation	3
2	FEATURES	4
2.1	NIBE MagiCAD Plugin User Interface	4
2.2	Insert AHU	5
2.3	Import AHU	9
2.4	Update AHU	11
2.5	Validate AHU	13
2.6	View AHU	14

1 General

1.1 About This Document

This document contains instructions on using *NIBE MagiCAD plugin for AutoCAD*. The plugin is a CAD extension application for inserting air handling units into MagiCAD for AutoCAD from NIBE Dim Vent web application.

1.2 Installing the Software

1.2.1 Required Third-party Software

NIBE MagiCAD plugin works with the following MagiCAD and AutoCAD versions:

- MagiCAD 2025 and AutoCAD 2021-2025
- MagiCAD 2026 and AutoCAD 2023-2026

1.2.2 Installation


1. Download setup file from
<https://portal.magicad.com/download/ProductSearch?searchStr=Nibe&categoryId=3>
2. Install NIBE MagiCAD Plugin for AutoCAD.

Administrator privileges are needed for the installation. The plugin will be installed to the AutoCAD version which has been opened last.


2 Features

2.1 NIBE MagiCAD Plugin User Interface


The NIBE plugin panel can be found from *MagiCAD Connect* tab in AutoCAD.




The plugin contains following features for air handling units:




The feature opens the NIBE Dim Vent web application where the air handling units can be created and configured. Once the air handling unit has been calculated in the web application, the air handling unit can be added to the drawing.




The feature opens a file dialog from which the user can choose a .mah file and import the air handling unit into the drawing.



The selected air handling unit will be replaced/updated to the drawing after the air handling unit has first been calculated in the web application.




The feature checks whether the user needs to perform an update operation for the selected air handling unit.



The feature shows technical data of the selected product. The selected product can be an air handling unit or a duct component.

2.2 Insert AHU



Follow these steps for inserting NIBE air handling unit into MagiCAD/AutoCAD drawing:

1. Click the *Insert AHU* button from the plugin ribbon panel in AutoCAD.
2. When the MagiCAD drawing is opened, the plugin asks to point ductworks for getting airflows, pressure drops and MagiCAD systems. This phase can be skipped by pressing Esc button.

The ducts can be selected with AutoCAD multiselecting tool or one by one.

3. The Dim Vent web application will be opened inside the plugin window.

If the user has not already logged in to the Dim Vent, the username and password are requested from the user.

Create the account to the Dim Vent web application via this link [NIBE Professional](#) before using the plugin.

Sign in

Sign in with your email address

Email Address

Password [Forgot your password?](#)

[Sign in](#)

4. Once the user has logged in to the web application, the project page is displayed. On this page, the user can create and modify projects. It is also possible to add a new air handling unit to the selected project.
5. When the *Create New Unit* button is clicked from the web application, the dialog will be opened where the user can search for a suitable air handling unit. If ducts were selected from the drawing in step 2, the data is read from the ducts and the data is pre-filled into corresponding fields in the Dim Vent.

The air handling unit can be selected from a list or by searching for a suitable unit using airflow and pressure drop data.


NIBE en-GB

Basic flow Supply: 1200 l/s, 170 Pa, 30 Pa Extract airflow: 1200 l/s, 170 Pa, 30 Pa Alternative flow: <input type="checkbox"/>				Execution Control system: <input checked="" type="checkbox"/> Outdoor usage: <input type="checkbox"/>	
Climate data Select country: Sweden Choose city: Kiruna		Winter Outdoor air temperature: -25.8 °C Outdoor air, relative humidity: 50.0 % Extract air, temperature: 21 °C Extract air, relative humidity: 25 %		Summer Outdoor air temperature: 23.0 °C Outdoor air, relative humidity: 43.0 % Extract air, temperature: 23 °C Extract air, relative humidity: 50 %	
<div> <div>Standard template</div>  </div> <div> <div>Outdoor version</div>  </div>				Unit size 1 - 6.5: FLOW 052 0.9 - 5.5: FLOW 0440 0.7 - 5: FLOW 0340 0.6 - 4: FLOW 0290 0.5 - 3: FLOW 0230 0.4 - 2.5: FLOW 0190 0.3 - 2: FLOW 0140 0.3 - 1.5: FLOW 0094	

- Once the air handling unit has been selected, the next step is to click the *Create Unit* button.
- The next step is to select properties of the air handling unit. When the properties are selected, clicking the *Perform Calculation* button will calculate the air handling unit.
- Once the air handling unit has been successfully calculated, clicking the *Insert* button from the plugin closes the browser window and starts inserting the unit into AutoCAD.

If the air handling unit is not calculated and the *Insert* button is clicked, the plugin shows the message “*The product data is not available. Please ensure that the product definition is finished.*”. In this case, please make sure that the air handling unit is calculated.

- The plugin installation dialog will appear.

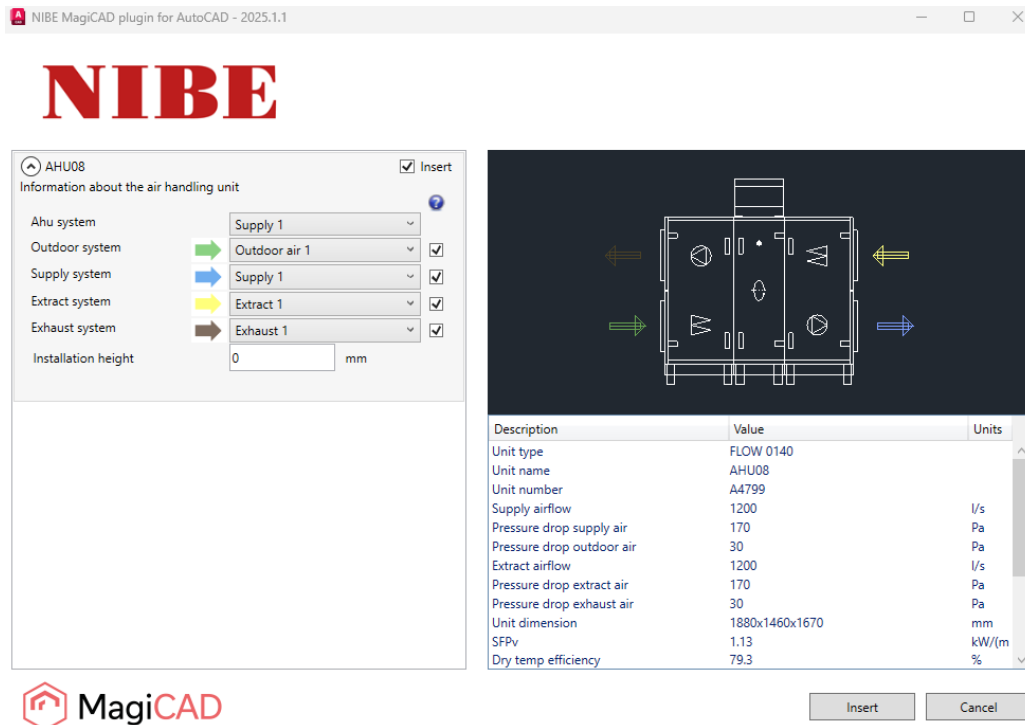


The geometry of the product is displayed on the top right side. The product can be zoomed with the mouse wheel.

Before installing the product to MagiCAD for AutoCAD, the systems (if MagiCAD drawing is available) must be selected for each duct connection. The available systems are read from the active MagiCAD project.

The plugin supports also pipe connections (heating and/or cooling). The system selections for the pipes are shown in the installation dialog if the air handling unit contains pipe connections.


The installation height (offset) of the product can be defined in the insertion dialog.

10. Once MagiCAD systems have been defined for all products, the installation can be started by clicking the *Insert* button.
11. The products can be placed in the drawing one by one by adding them to the desired position in the drawing.

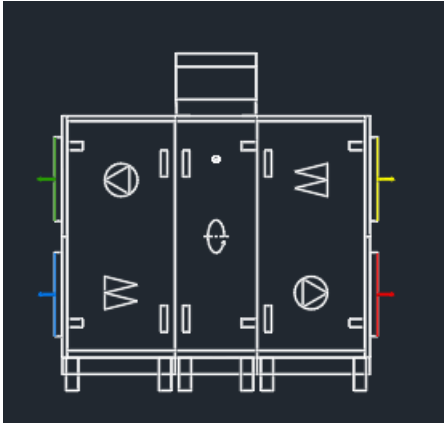

Once the air handling unit is inserted into AutoCAD, it can be connected to ducts and pipes.

2.3 Import AHU




This feature allows the plugin user to select a file exported from the NIBE Dim Vent web application (*.MAH extension) and import the air handling unit(s) from the file to MagiCAD for AutoCAD and AutoCAD.

Before the *Import AHU* feature from the plugin is used, the air handling unit(s) needs to be first exported from the NIBE Dim Vent web application.


The Dim Vent user and the plugin user can be a different person.

Follow these steps for importing a NIBE air handling unit into MagiCAD for AutoCAD or AutoCAD.

1. Click the *Import AHU* button from the plugin ribbon panel in AutoCAD.
2. Select the MAH file from the file dialog.

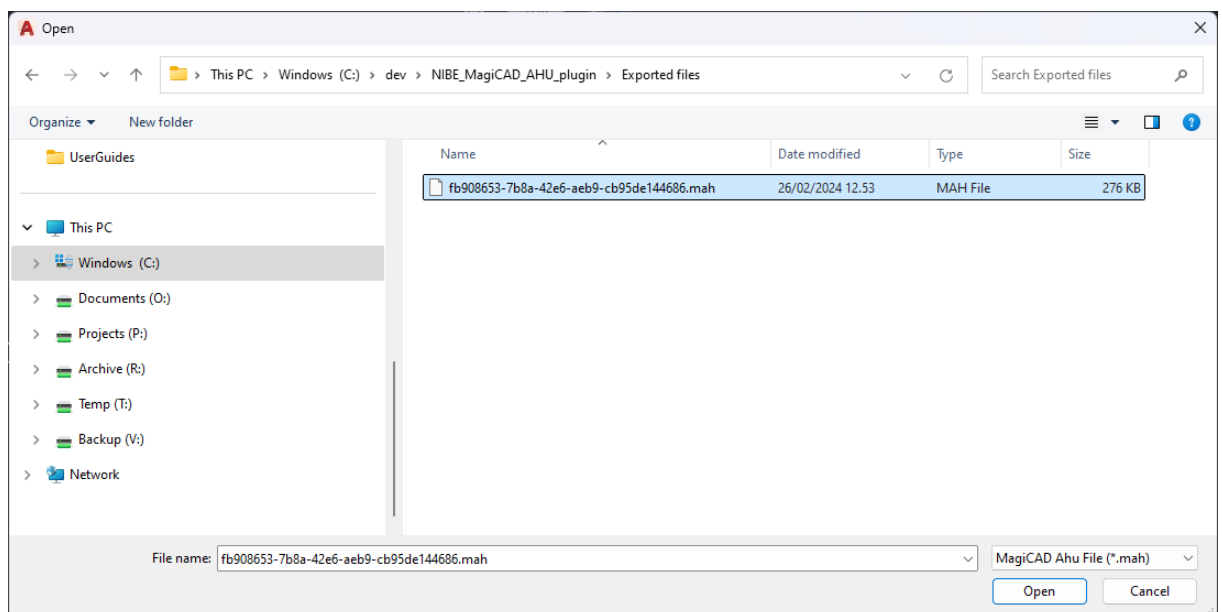

3. After clicking the *Open* button, the plugin reads the transfer file (*.MAH) and loads the air handling unit to the insertion dialog.

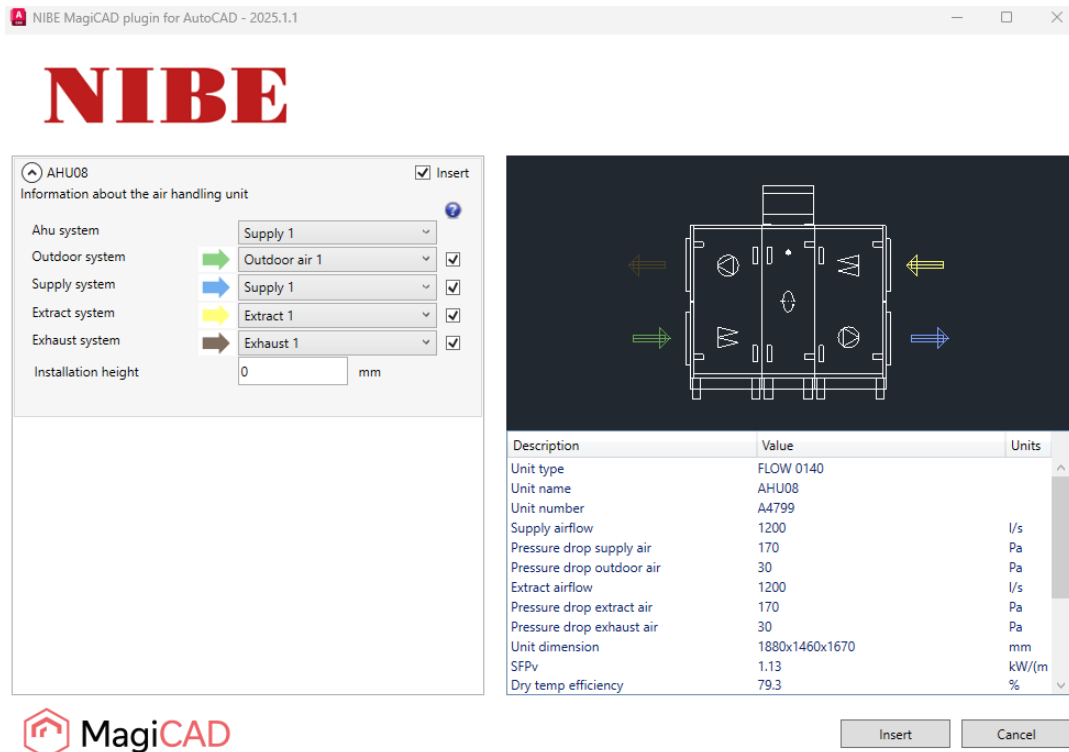


The geometry of the product is displayed on the top right side. The product can be zoomed with the mouse wheel.

Before installing the product to MagiCAD for AutoCAD, the systems must be selected for each duct connection. The available systems are read from the active MagiCAD project.

The plugin supports also pipe connections (heating and/or cooling). The system selections for the pipes are shown in the installation dialog if the air handling unit contains pipe connections.

The installation height (offset) of the product can be defined in the insertion dialog.

- Once the selections have been made in the insertion dialog, the insert operation can be started by clicking *Insert* button.
- The product(s) can be placed in the drawing one by one by dragging them to the wanted position. Once the air handling unit is inserted into the drawing, it can be connected to ducts and pipes.

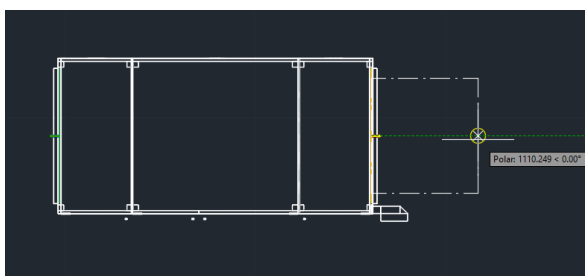


2.4 Update AHU



Follow these steps to update NIBE air handling unit to drawing:


1. Click the *Update AHU* button from the plugin ribbon panel in AutoCAD.
2. Select the air handling unit from the drawing which will be updated.
3. The selected air handling unit is opened from the Dim Vent web application. The plugin automatically transfers the updated airflow and pressure drop requirements from the duct connections in the drawing to the web application.

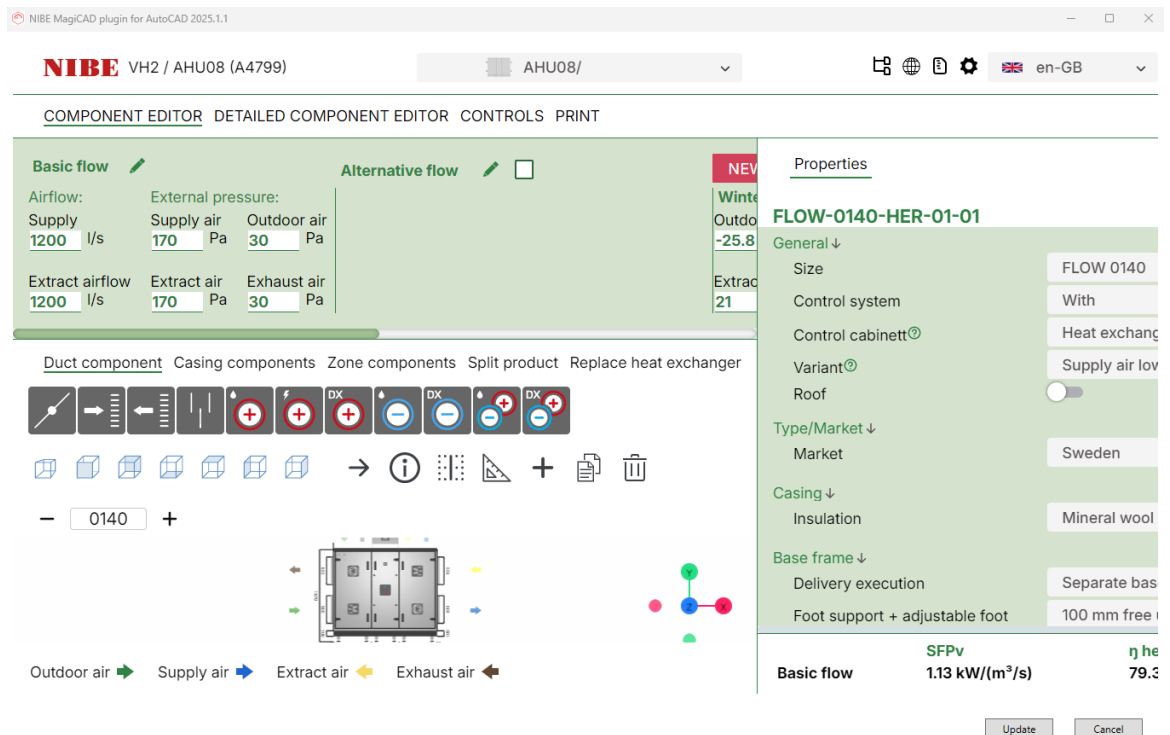

The user can change the predefined air handling unit type or edit unit properties.


4. When the active air handling unit is configured and recalculated, the user can click the *Update* button.
5. The plugin will perform compare operation to validate whether the original air handling unit has been changed to a different kind of air handling unit during the update operation.

If the air handling unit is the same, only technical data is updated to the existing air handling unit in the drawing. In this case, the following message will be shown:

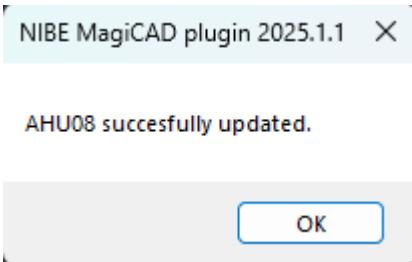

If the air handling unit has been changed to another one, the plugin performs the replacement operation. In this case, the plugin will delete the original air handling unit from the drawing, and the plugin places a new air handling unit to the same position with the same MagiCAD system selections. The user is required to connect the air handling unit to the ductwork.

The user will see this dialog:

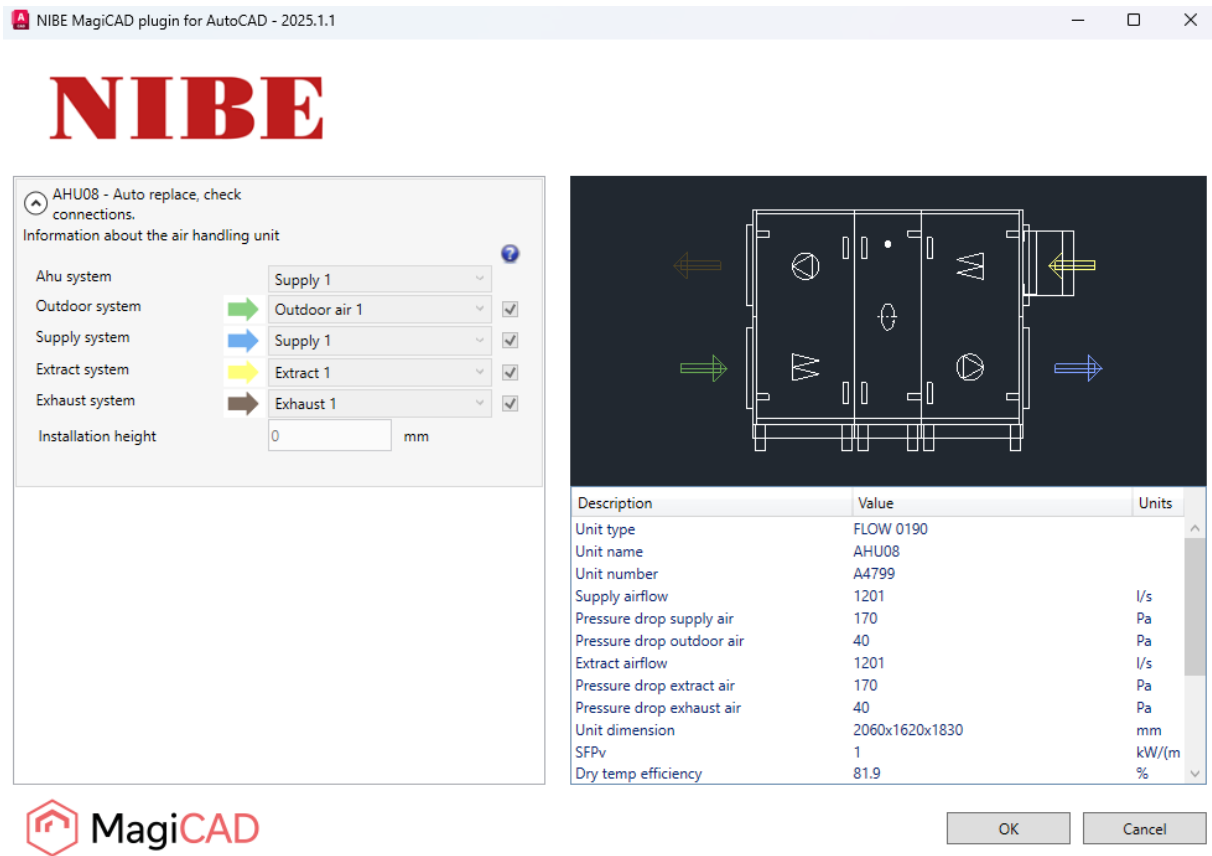

This dialog is only informative, and no actions are required from the user. If the new duct components are added during update, those will be inserted into the drawing at this point.


The user can see from the dialog which MagiCAD systems are automatically selected for the new air handling unit. The user can exit the dialog by clicking **OK** button.

2.5 Validate AHU




Follow these steps to validate a NIBE air handling unit. Please remember that the air handling unit must be connected to the ducts before the validation.

1. Click the *Validate AHU* button from the plugin ribbon panel in AutoCAD.
2. Select the air handling unit from the drawing.
3. The plugin shows if validating was successful or if the air handling unit needs to be updated. If updating is needed, the user can continue to update or cancel the validation. The validation checks if the selected air handling unit still meets the requirements of the ductwork (air flow and pressure drop).

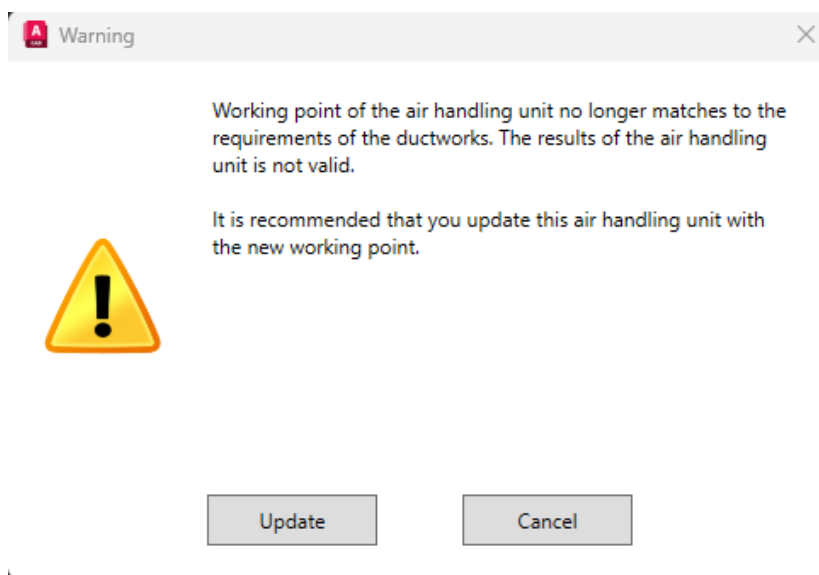

If the *Update* button is clicked from the dialog, the process continues in the same way as in the update feature.

2.6 View AHU



The *View AHU* feature lets users see technical data for the selected NIBE air handling unit.

Follow these steps for viewing the NIBE air handling unit's data:

1. Click the *View AHU* button from the plugin ribbon panel in AutoCAD.
2. Select the air handling unit from the drawing.
3. The plugin dialog will be opened. The dialog is the same as in the *Insert AHU* feature. The only change is that the dialog is read-only.

